


# LU3E

## HW - LAME PERIL TAGLIO DI PANNELLIBILAMINATI T.C.T. SAWBLADESTO CUT BILAMINATED PANELS


Rif. LU27M

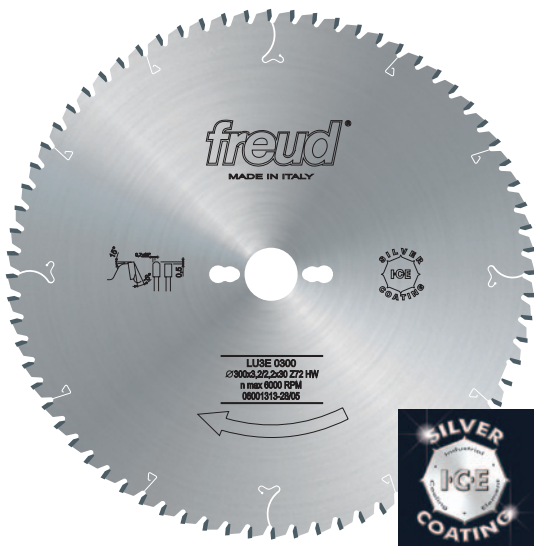


Píllový kotúč pre rezanie obojstrannej laminátovej triesky s maximálnou hrúbkou 30 mm, bez štiepania. Špeciálna úprava s negatívnym uhlom rezu a so špeciálnym spekaným karbidom. Používa sa na formátovaciu pílu a nárezové centrum bez použitia predrezávacieho pílového kotúča. Syntetická povrchová úprava udržiava tvar pílového kotúča v pôvodnom tvare.

D mm	B mm	b mm	d mm	Z	FORI TRASCINAMENTO PIN HOLES	CODICE CODE
220	3,2	2,2	30	56	FT01	LU3E 0100
250	3,2	2,2	30	60	FT01	LU3E 0200
300	3,2	2,2	30	72	FT01	LU3E 0300
350	3,5	2,5	30	84	FT01	LU3E 0400

**FT01**= 2/7/42 + 2/9/46,4 + 2/10/60

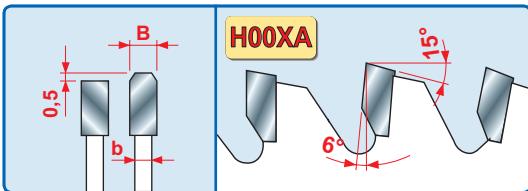

CARATTERISTICHE DEL DENTE / TOOTH'S FEATURES



**> Application:**

To size bilaminated panels without the employment of the scoring sawblade, up to 40 mm thick. In detail, it is suitable to work melamine-coated panels.

**Machines:**


Circular saws, horizontal panel sizing machines, vertical panel sizing machines.

**Features:**


Flat-triple chip tooth with negative cutting angle.

**Material:**

Bilaminated panels.

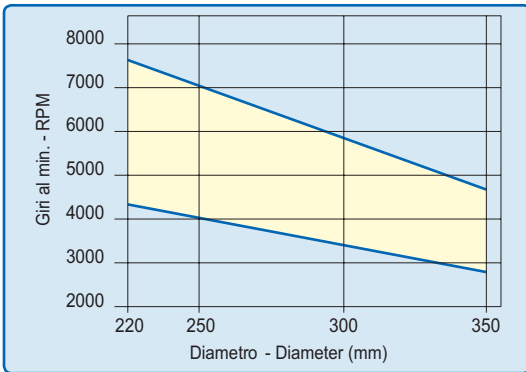

Minimum and maximum RPM based on the blade diameter.

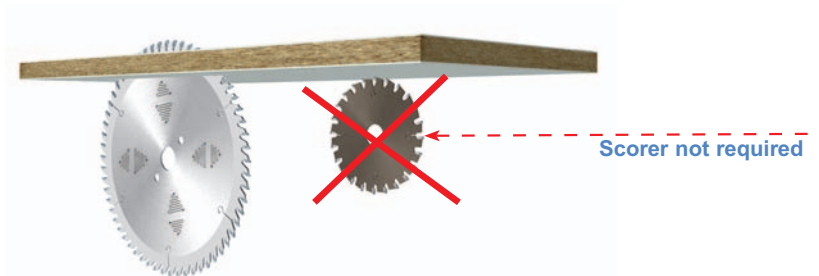

	SUFFICIENTE SUFFICIENT	BUONO GOOD	OTTIMO EXCELLENT
COMPOSTI DI LEGNO WOOD COMPOSITED	[Progressive color bar from blue to red]		
LAMINATI LAMINATES	[Progressive color bar from blue to red]		