

TOOLS AVAILABLE FO F3

Coarse Sanding

| | | |
|---------------------------------|----------|-------|
| Quick-Flex 20 seg. / 40 / 50 mm | P 60-100 | ∅ 150 |
| Quick-Flex 28 seg. / 40 / 50 mm | P 60-100 | ∅ 200 |
| Quick-Star | P 60-100 | ∅ 140 |

Medium Sanding

| | | |
|---------------------------------|----------|-------|
| Quick-Flex 20 seg. / 65 / 50 mm | P 80-120 | ∅ 200 |
| Quick-Star | P 80-120 | ∅ 140 |
| Quick-Star | P 80-120 | ∅ 180 |

Finish/Sealer Sanding

| | | |
|---------------------------------|-----------|-------|
| Quick-Flex 20 seg. / 65 / 50 mm | P 150-320 | ∅ 200 |
| Quick-Star | P 150-320 | ∅ 140 |
| Quick-Star | P 150-320 | ∅ 180 |

TECHNICAL SPECIFICATIONS

F3



| | |
|-------------------------------|--------------|
| Air motor | 1700 rpm max |
| Air pressure | 6 bar max |
| Air consumption | 5 l/s |
| Output | 170 W |
| Number of Quick Star | 20 |
| Working width, Quick Flex max | 50 mm |
| Length of spindle | 50 mm |
| Net weight | 0,7 Kg |
| Gross weight | 1,0 Kg |



F3

Air tool , small diameter-light weight. Suitable for sanding and brushing.

For a perfect sanding and brushing.

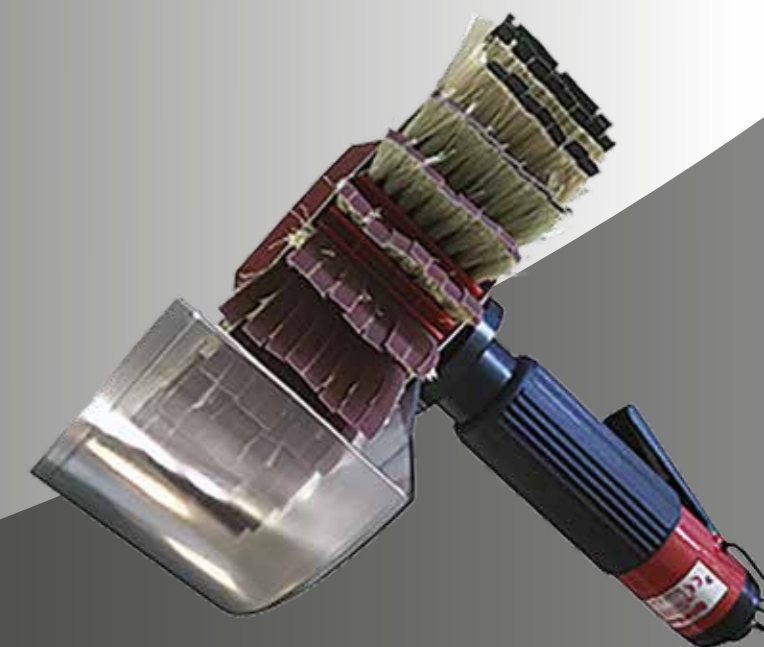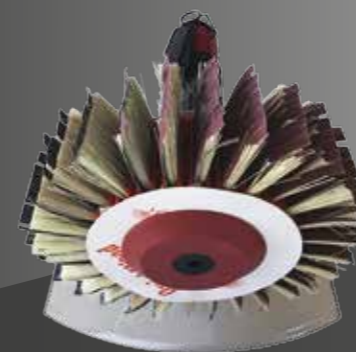

APPLICATIONS

- Corners
- Narrow Profiles
- Difficult spots
- Suitable for the treatment of denim

CHARACTERISTICS

- With coarse grift of Quick Flex you can make even rough wood sanding
- Complete with air hose
- Removable dust shield
- Sturdy air motor with Teflon vanes
- Equipped with a hexagonal axle for direct power transfer

ADVANTAGES

- Always ready to use for small series out of standard or special shapes
- Extremely low weight for Quick Flex and Quick Star brushes with a maximum diameter of 200mm and a thickness of 50 mm
- Reduced dimensions