



LU3D

HW - LAME PERIL TAGLIO DI PANNELLIBILAMINATI T.C.T. SAWBLADES TO CUT BILAMINATED PANELS


Rif. LU11M-LU26M

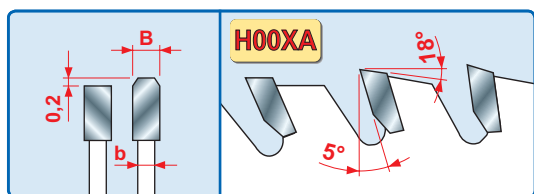

CARATTERISTICHE DEL DENTE / TOOTH'S FEATURES

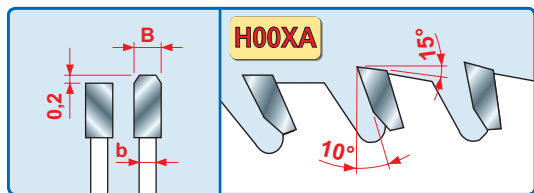

CARATTERISTICHE DEL DENTE / TOOTH'S FEATURES

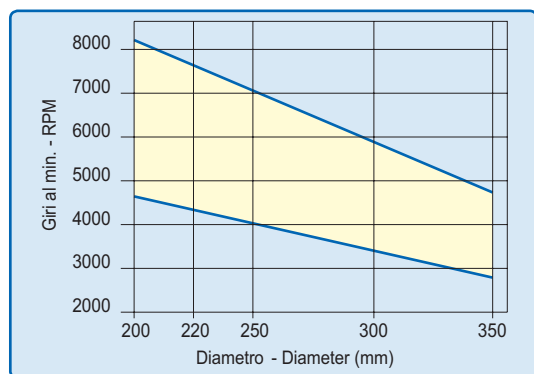

Minimum and maximum RPM based on the blade diameter.



Formátovanie DTD lamino s predrezom. Trapez pozitív s antivibračným a nízkoohľavným vyhotovením. Vysoká životnosť ostria, veľký počet opakovaných ostrení.

| D mm | B mm | b mm | d mm | Z | α | FORI TRASCINAMENTO PIN HOLES | CODICE CODE |
|---------|---------|---------|---------|-----|----|---------------------------------|----------------|
| 200 | 3,2 | 2,2 | 30 | 64 | 5° | FT01 | LU3D 0100 ● |
| 220 | 3,2 | 2,2 | 30 | 64 | 5° | FT01 | LU3D 0200 ● |
| 250 | 3,2 | 2,2 | 30 | 80 | 5° | FT01 | LU3D 0300 ● |
| 250 | 3,2 | 2,2 | 30 | 80 | 5° | FT01 | LU3D 0400 ● |
| 300 | 3,2 | 2,2 | 30 | 96 | 5° | FT01 | LU3D 0500 ● |
| 300 | 3,2 | 2,2 | 30 | 96 | 5° | FT01 | LU3D 0600 ● |
| 300 | 3,2 | 2,2 | 35 | 96 | 5° | | LU3D 0700 ● |
| 350 | 3,5 | 2,5 | 30 | 108 | 5° | FT01 | LU3D 0800 ● |
| 350 | 3,5 | 2,5 | 30 | 108 | 5° | FT01 | LU3D 0900 ● |

(Rif. LU11M) Hook angle 5° for cutting heights up to 30 mm

| D mm | B mm | b mm | d mm | Z | α | FORI TRASCINAMENTO PIN HOLES | CODICE CODE |
|---------|---------|---------|---------|-----|-----|---------------------------------|----------------|
| 250 | 3,2 | 2,2 | 30 | 60 | 10° | FT01 | LU3D 1000 ● |
| 250 | 3,2 | 2,2 | 30 | 60 | 10° | FT01 | LU3D 1100 ● |
| 300 | 3,2 | 2,2 | 30 | 72 | 10° | FT01 | LU3D 1200 ● |
| 300 | 3,2 | 2,2 | 30 | 84 | 10° | FT01 | LU3D 1300 ● |
| 300 | 3,2 | 2,2 | 30 | 96 | 10° | FT01 | LU3D 1400 ○ |
| 300 | 3,2 | 2,2 | 30 | 96 | 10° | FT01 | LU3D 1500 ○ |
| 350 | 3,5 | 2,5 | 30 | 72 | 10° | FT01 | LU3D 2000 ● |
| 350 | 3,5 | 2,5 | 30 | 108 | 10° | FT01 | LU3D 1600 ○ |
| 350 | 3,5 | 2,5 | 30 | 108 | 10° | FT01 | LU3D 1700 ● |

(Rif. LU26M) Hook angle 10° for cutting heights up to 40 mm



FT01 = 2/7/42 + 2/9/46,4 + 2/10/60

> **Application:** To size bilaminated panels with the employment of the scoring sawblade, in detail melamine-coated panels, with good finishing and long cutting life.

Machines: Circular saws, horizontal panel sizing machines.

Features: Flat-triple chip tooth with positive cutting angle.

Material: Bilaminated panels.

| SUFFICIENTE SUFFICIENT | BUONO GOOD | OTTIMO EXCELLENT |
|---|---------------|---------------------|
| COMPOSTI DI LEGNO WOOD COMPOSITED  | | |
| LAMINATI LAMINATES  | | |