


# CIRCULAR SAW BLADES FOR WOOD



## For small table saws



**Machines:**  
Small table saws.


**Materials:**  
Soft and hard solid wood, chipboard, plywood, MDF and other wood based materials.

**Technical information:**  
ATB tooth with positive cutting angle.



D	B	b	d	Z	Hook A1	Rip cut quality	Cross cut quality	NL	Freud Code	Art. No.
190	2,0	1,3	30	24	15°	•••	•	2/7/42	FR13W001T	F03FS09767
190	2,0	1,3	30	48	5°	•	•••	2/7/42	FR13W002T	F03FS09768
190	2,4	1,6	Star	24	15°	•••	•	-	FR13W003T	F03FS09769
190	2,4	1,6	Star	48	5°	•	•••	-	FR13W004T	F03FS09770
220	2,6	1,6	30	48	10°	••	••	2/7/42	FR17W001T	F03FS09771
225	2,6	1,6	30	32	15°	•••	•	2/7/42	FR18W001T	F03FS09772
225	2,6	1,6	30	48	10°	••	••	2/7/42	FR18W002T	F03FS09773
250	2,8	1,8	30	24	20°	•••	•	2/6/42	FR23W001T	F03FS09774
250	2,8	1,8	30	40	15°	•••	•	2/6/42	FR23W002T	F03FS09775
250	2,8	1,8	30	60	10°	••	••	2/6/42	FR23W003T	F03FS09776
250	2,8	1,8	30	80	5°	•	•••	FT121	FR23W004T	F03FS09777
254	2,6	1,8	30	24	20°	•••	•	2/6/42	FR24W001T	F03FS09778
254	2,6	1,8	30	40	15°	•••	•	2/6/42	FR24W002T	F03FS09779
254	2,6	1,8	30	60	10°	••	••	FT121	FR24W003T	F03FS09780
254	2,6	1,8	30	80	5°	•	•••	FT121	FR24W004T	F03FS09781
255	2,8	1,8	25,4	40	15°	•••	•	-	FR25W002T	F03FS10134
255	2,8	1,8	25,4	60	15°	••	••	-	FR25W003T	F03FS10135
255	2,8	1,8	25,4	80	15°	•	•••	-	FR25W004T	F03FS10136
260	2,6	1,8	30	60	10°	••	••	-	FR26W001T	F03FS09782
260	2,6	1,8	30	80	5°	•	•••	FT121	FR26W002T	F03FS09783
300	2,5	1,8	30	48	15°	•••	•	2/10/60	FR28W001T	F03FS09784
300	2,5	1,8	30	72	10°	••	••	2/10/60	FR28W002T	F03FS09785
300	2,5	1,8	30	100	5°	•	•••	FT121	FR28W003T	F03FS09786
305	2,8	1,8	25,4	96	15°	•	•••	-	FR29W002T	F03FS10138
305	2,8	1,8	30	100	5°	•	•••	2/10/60	FR29W001T	F03FS09787
355	3,0	2,2	25,4	108	15°	•	•••	-	FR33W001T	F03FS10137


FT121: 2/7/42 + 2/9/46 + 2/9,5/46,5 + 2/10/60




**Machines:**  
Cordless small table saws.

**Materials:**  
Soft and hard solid wood, chipboard, plywood, MDF and other wood based materials.

**Technical information:**  
Specifically designed to maximise battery runtime and optimise ease of cut on cordless table saws. Thin kerf teeth and axial shear angle on tooth front. ATB tooth with positive cutting angle.

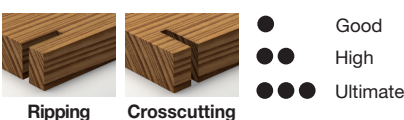

## For cordless small table saws



D	B	b	d	Z	Hook A1	Rip cut quality	Cross cut quality	NL	Freud Code	Art. No.
210	2,0	1,4	30	24	25°	•••	•	-	FR15W001TC	F03FS10068
210	2,0	1,4	30	48	15°	•	•••	-	FR15W002TC	F03FS10069
216	2,0	1,4	30	24	25°	•••	•	-	FR16W001TC	F03FS10070
216	2,0	1,4	30	48	15°	•	•••	-	FR16W002TC	F03FS10071
254	2,1	1,6	30	24	25°	•••	•	-	FR24W005TC	F03FS10072
254	2,1	1,6	30	40	20°	••	••	-	FR24W006TC	F03FS10073
254	2,1	1,6	30	60	15°	•	•••	-	FR24W007TC	F03FS10074