



# LU5E

## HW - LAME PERIL TAGLIO DI METALLINON FERROSI T.C.T. SAWBLADES TO CUT NON-FERROUS METALS

Rif. LU38M

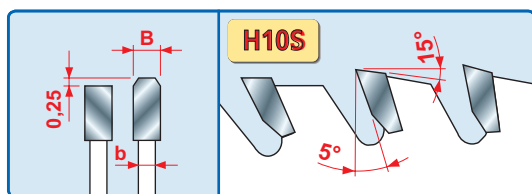

- TOOTH'S FEATURES

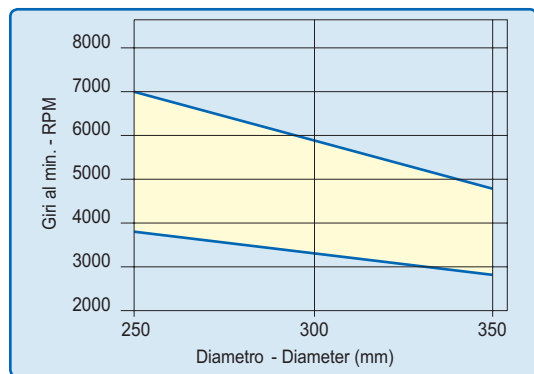

Minimum and maximum RPM based on the blade diameter.



Pílový kotúč vhodný pre rezanie profilov a zvlášť tenkých dosák z hliníka a neželezných kovov. Rezaný materiál musí byť starostlivo upnutý.

D mm	B mm	b mm	d mm	Z	FORI TRASCINAMENTO PIN HOLES	CODICE CODE
250	2,8	2,2	30	100	FT01	LU5E 0100 ◊
250	2,8	2,2	32	100	2/11/63	LU5E 0200 ●
255	2,8	2,2	25,4	100		LU5E 0300 ●
255	2,8	2,2	25,4	120		LU5E 0400 ●
300	3,0	2,5	30	100	FT01	LU5E 0500 ◊
300	3,0	2,5	30	120	FT01	LU5E 0700 ●
300	3,0	2,5	32	120	2/11/63	LU5E 0800 ●
305	3,0	2,5	25,4	120		LU5E 0600 ●
350	3,0	2,5	30	100	FT01	LU5E 0900 ●
350	3,0	2,5	32	100	2/11/63	LU5E 1000 ◊
350	3,0	2,5	30	120	FT01	LU5E 1100 ●
350	3,0	2,5	32	120	2/11/63	LU5E 1200 ◊

**FT01**= 2/7/42 + 2/9/46,4 + 2/10/60

**> Application:** To cut special drawn products, such as tubes and similar products having ultra-thin walls. The reduced thickness allows an excellent cutting finish, without splintering, and optimises its employment in low-power machines, too.

**Machines:** Mitre saws with mechanical clamping of the piece.

**Features:** Flat-triple chip tooth with positive cutting angle.

**Material:** Aluminium, non-ferrous metals.

SUFFICIENTE SUFFICIENT	BUONO GOOD	OTTIMO EXCELLENT

NON-FERROUS METALS

