


## HSK-63 ADAPTERS FOR CIRCULAR SAWBLADES

ART. T128

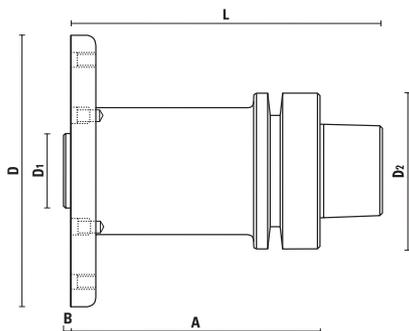

- The hollow taper shank is produced according to DIN69893
- Complete with nr. 6 screws (M6x10) for the proper assembly of sawblades with 60° at 90 mm distance
- For mounting sawblades with 30 mm bore
- **For mounting sawblades with diameter between 200 and 350 mm**

RPM  
24.000

T139.163.N

BALLUFF  
POCKET

Item	Taper	A	D	D1	D2	B	L
T128.160.R	HSK-63F	40	110	30	63	2,5	65
T128.165.R	HSK-63F	100	110	30	63	2,5	125
T128.170.R	HSK-63E	40	110	30	63	2,5	72
T128.175.R	HSK-63E	100	110	30	63	2,5	132





Z051.014.R

### EXAMPLE OF USE:

HSK63 adapter with mounted Saw Blade

Art. T128.160.R - T128.165.R  
T128.170.R - T128.175.R

**OPTIONS:**  
Security flange (item Z092.100.N) to secure sawblades with maximum diameter of 400 mm by changing screws.

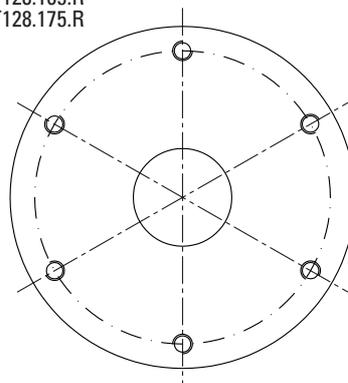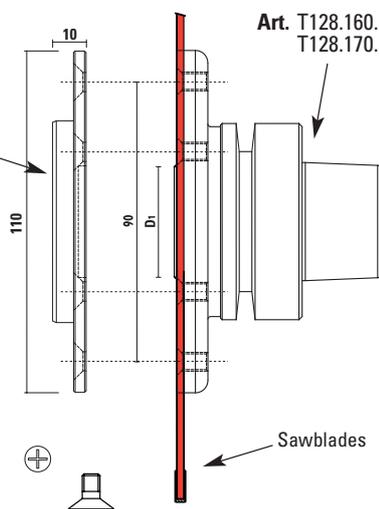


Go to page 12.30 to see the range of sawblades for these adaptors



**SCREW (ART. Z051.014.R)**  
M6x10 countersunk flat head screw

## SECURITY FLANGE FOR SAW BLADES ADAPTERS

ART. Z092



- To be used with our adapters, see items T128.160/165.R - T128.170/175.R
- **Security flange improves stability and reduces vibrations when precision cuts are needed**
- Complete with nr. 6 screws for the proper assembly of the sawblades with 60° at 90 mm distance
- **Maximum sawblades diameter of 400 mm**

### ATTENTION:

Replace the adapters screws with those provided with the security flange.

Item	D	Sp
Z092.100.N	110	10



Z051.024.R