

Machines:
Multiripping machines.

Materials:
Softwood and hardwood, both with humidity rate over 10%, long fibre wood.

Applications:
Multiripping.

Technical information:
Saw blades for ripping extra tick timber. Suitable for cutting wet wood and wood with high resin content.

LM06


Increased kerf multiripping saw blades with rakers



Multiripping Machines



Softwood



Hardwood




Multiripping




●●● Ultimate ●● High ● Good

D	B	b	d	Z	NL	Freud Code	Art. No.
mm	mm	mm	mm				
250	4,2	3,0	30	16+2+2	2CH 10x4 + FT02	LM06 0100	F03FS03104
250	4,2	3,0	60	16+2+2	4CH 21x5	LM06 0200	F03FS03106
250	4,2	3,0	70	16+2+2	4CH 21x5	LM06 0300	F03FS03108
250	4,2	3,0	80	16+2+2	2CH 21x5 + 2CH13x5	LM06 0400	F03FS03110
300	3,5	2,5	70	20+2+2	4CH 21x5	LM06 1500	F03FS03133
300	3,5	2,5	80	20+2+2	2CH 13x5 + 2CH 21x5	LM06 1600	F03FS03135
300	4,2	3,0	30	20+2+2	2CH 10x4 + FT02	LM06 0500	F03FS03113
300	4,2	3,0	60	20+2+2	4CH 21x5	LM06 0600	F03FS03115
300	4,2	3,0	70	20+2+2	4CH 21x5	LM06 0700	F03FS03117
300	4,2	3,0	80	20+2+2	2CH 13x5 + 2CH 21x5	LM06 0800	F03FS03119
320	4,2	3,0	30	20+2+2	2CH 10x4 + FT02	LM06 0900	F03FS03121
320	4,2	3,0	70	20+2+2	4CH 21x5	LM06 1900	F03FS03140
320	4,2	3,0	80	20+2+2	2CH 13x5 + 2CH 21x5	LM06 1000	F03FS03123
350	4,2	3,0	30	20+2+4	2CH 10x4 + FT02	LM06 1100	F03FS03125
350	4,2	3,0	50	20+2+4	2CH 10x4	LM06 1800	F03FS03138
350	4,2	3,0	60	20+2+4	4CH 21x5	LM06 1200	F03FS03127
350	4,2	3,0	70	20+2+4	4CH 21x5	LM06 1300	F03FS03129
350	4,2	3,0	80	20+2+4	2CH 13x5 + 2CH 21x5	LM06 1400	F03FS03131

FT02 : 2/9/46,4 + 2/10/60

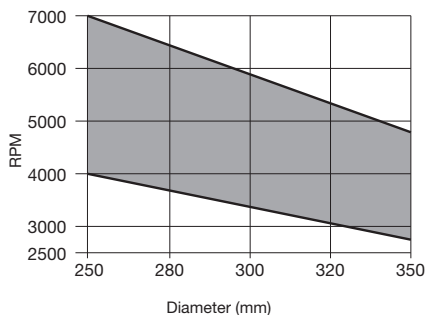

Minimum and maximum RPM based on the blade diameter.

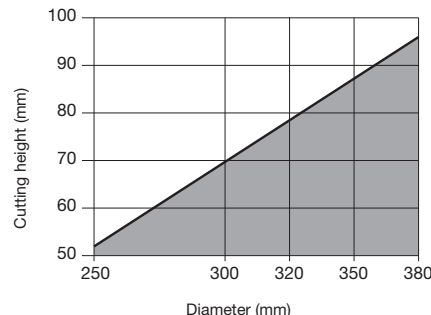

Maximum depth of rip and crosscut based on the blade diameter.

● Solid wood