




## LM02

## Reduced kerf multiripping saw blades with rakers



Multiripping Machines



Moulders



Softwood



Hardwood




Multiripping



●●● Ultimate ●● High ● Good



### HW H01K - Flat tooth

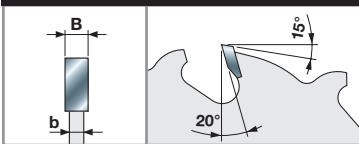

#### Machines:

Multiripping machines and moulders.

#### Materials:

Softwood and hardwood, both dried at max 15% humidity rate.

#### Applications:

Multiripping and moulding.


#### Technical information:

Ripping saw blades where the reduced kerf minimises material wastes.


Not suitable for twisted timber.

D	B	b	d	Z	NL	Freud Code	Art. No.
mm	mm	mm	mm				
250	2,8	2,0	30	16+2	2CH 10x4 + FT02	LM02 0100	F03FS02797
250	2,8	2,0	60	16+2	4CH 21x5	LM02 0200	F03FS02799
250	2,8	2,0	70	16+2	4CH 21x5	LM02 0300	F03FS02801
250	2,8	2,0	80	16+2	2CH 13x5 + 2CH 21x5	LM02 0400	F03FS02803
280	2,8	2,0	80	18+2	2CH 13x5 + 2CH 21x5	LM02 0500	F03FS02805
300	2,8	2,0	30	20+2	2CH 10x4 + FT02	LM02 0600	F03FS02807
300	2,8	2,0	60	20+2	4CH 21x5	LM02 0700	F03FS02809
300	2,8	2,0	70	20+2	4CH 21x5	LM02 0800	F03FS02811
300	2,8	2,0	80	20+2	2CH 13x5 + 2CH 21x5	LM02 0900	F03FS02813
320	3,0	2,2	30	20+2+2	2CH 10x4 + FT02	LM02 1000	F03FS02815
320	3,0	2,2	80	20+2+2	2CH 13x5 + 2CH 21x5	LM02 1100	F03FS02817
350	3,0	2,2	30	24+2+2	2CH 10x4 + FT02	LM02 1200	F03FS02819
350	3,0	2,2	60	24+2+2	4CH 21x5	LM02 1300	F03FS02821
350	3,0	2,2	70	24+2+2	4CH 21x5	LM02 1400	F03FS02823
350	3,0	2,2	80	24+2+2	2CH 13x5 + 2CH 21x5	LM02 1500	F03FS02825

FT02 : 2/9/46,4 + 2/10/60

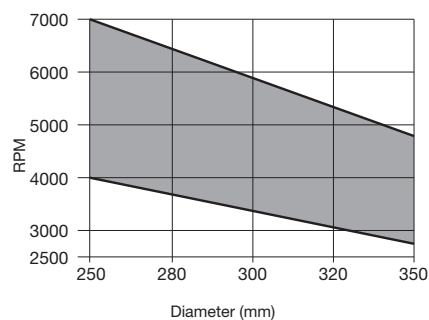

Minimum and maximum RPM based on the blade diameter.

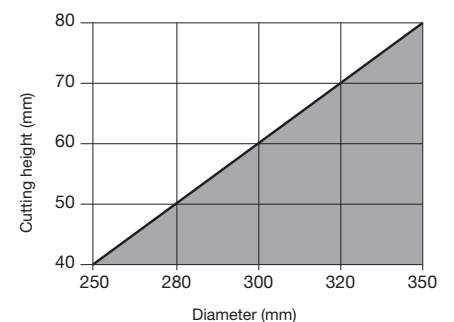

Maximum depth of rip and crosscut based on the blade diameter.

● Solid wood